

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
31 January 2002 (31.01.2002)


PCT

(10) International Publication Number  
WO 02/08039 A1

- (51) International Patent Classification<sup>7</sup>: B60T 13/66, James [GB/GB]; 39A Mill Road, Rearsby, Leicester LE7 4YN (GB).  
13/74, F16D 55/40
- (21) International Application Number: PCT/GB01/03295 (74) Agent: ARCHER, Philip, B.; Urquhart-Dykes & Lord, New Priestgate House, 57 Priestgate, Peterborough, Cambs PE1 1JX (GB).
- (22) International Filing Date: 24 July 2001 (24.07.2001)
- (25) Filing Language: English (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (26) Publication Language: English
- (30) Priority Data: 0018154.5 25 July 2000 (25.07.2000) GB (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
- (71) Applicant (for all designated States except US): DELPHI TECHNOLOGIES INC [US/US]; Legal Staff, Mailcode : 480-414-420, Troy, MI 48007-5052 (US).
- (72) Inventor; and
- (73) Inventor/Applicant (for US only): BUNKER, Kenneth,

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR CONTROLLING A BRAKING SYSTEM

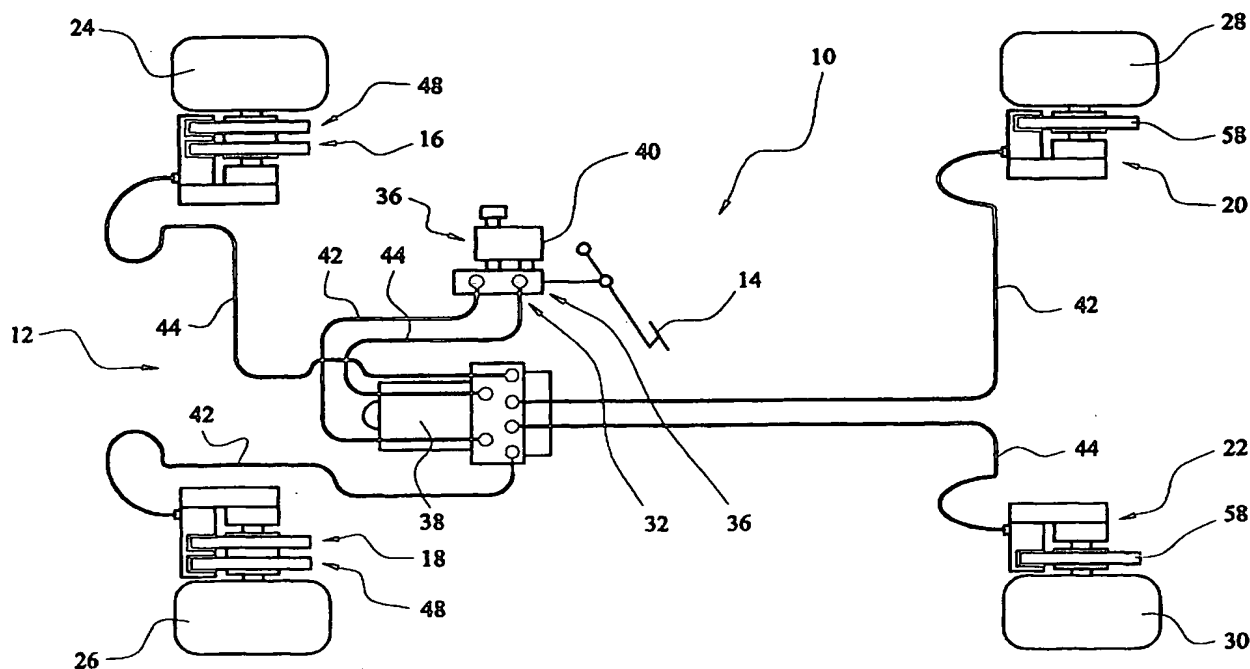

(57) Abstract: Method and apparatus for controlling the front and rear wheel braking system of a road-going mass-produced motor car or automobile enables provision of brake-by-wire facilities utilising an electrically-powered servo motor (34) to generate brake-operating thrust which is applied to the interleaved friction elements (64, 66, 68) and twin discs (54, 56) of a disc brake (16) having axially slidable discs and a fixed caliper (52) and disc and friction element-actuator control means (70, 72). The brake is of spot-type disc brake construction and the servo motor applies less brake-actuating thrust than is required for a comparable fixed disc and floating caliper construction.

WO 02/08039 A1



IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*

METHOD AND APPARATUS FOR CONTROLLING A BRAKING SYSTEM

This invention relates to a method and apparatus for  
5 controlling a braking system and more particularly but not  
exclusively to a method and apparatus for controlling the  
front and rear wheel braking system of a road-going mass-  
produced motor car or automobile and the like, including  
small vans, pick-up trucks and other vehicles which differ  
10 from these mainly only in bodywork structure and/or detail.  
The particular aspect of the present invention which is of  
current demand and interest relates to the provision of a  
so-called brake-by-wire system for road-going mass-produced  
motor cars or automobiles. Non mass-produced vehicles are  
15 not subject to the same stringency of cost and space and  
other parameters as mass-produced vehicles.

The requirement for an effective brake-by-wire system  
for cars and automobiles, particularly mass-produced ones,  
has gained even more interest in recent years due to the  
20 availability of digitally-controlled systems for management  
of braking and other hardware which gives the opportunity  
for incorporating into mass-produced motor vehicles  
facilities for sophisticated control of braking and other  
systems using available data-processing hardware and  
25 software.

As is well known, current systems for the control of  
roadgoing mass produced motor cars and automobiles involve  
either totally hydraulic systems or hydraulic systems with  
an electronic:hydraulic interface at some point in the  
30 system. While such systems have been made to work reasonably  
effectively, it is clear to all concerned that a significant  
advance would be achieved if an entirely  
electronic/electric-powered system could be provided in  
order to enable the system to operate without such an

interface and without the potential for interface-related technical difficulties and discontinuities.

However, although the search for a brake-by-wire system has intensified in recent years, and has been a matter of significant interest for several decades, yet the problem has not been solved. Many proposals exist for brakes, including disc brakes utilising electric actuation systems. None of these has been found to meet the practical and commercial and legal/regulatory requirements for such a system.

The present invention represents a different approach to this question from all prior proposals known to the applicants in the sense that the present invention seeks to provide such a system by addressing the (hitherto somewhat ignored) core question of the general design structure of the disc brake for such a system, instead of concentrating on other aspects of the system. In this way the embodiments of the present invention provide an approach to the design of a brake-by-wire system which enables such to be produced in a practical form which can use significant proportions of currently available parts and equipment.

We have discovered that the features of the embodiments described above lead to the surprising result that the long-sought-after goal of so-called brake-by-wire (in the sense of providing a braking system for a mass-produced motor car) can be met within the cost and space and performance parameters which have been firmly established by the many decades of development of hydraulic braking systems (to the point where they are now so firmly entrenched that the adoption of an alternative system for use on any significant production scale by a mass manufacturer of motor vehicles represents an almost impossible task). This is due to the simplicity and relatively low cost of such systems, not to mention their compact format.

We have discovered that this barrier to the provision of a brake-by-wire system for mass production vehicles can be met by a rather specific combination of features which leads to this unexpected result.

5        Although one factor in the equation concerns the necessary actuating force to be applied between the interacting brake friction surfaces, it is by no means the only significant factor and we have discovered that important related factors concern the provision of other  
10 features of the overall brake configuration.

Thus, for example, a not-insignificant factor concerns the features provided relating to the axial slideability of the two or more brake discs and the related spot-type construction of the brake itself. While of course it is well  
15 established that aircraft brakes employ a plurality of axially slidable discs and interleaved friction elements, nevertheless the actuating forces required in that regard (even on a per unit area of friction surface basis) may be quite high as compared with those conventionally employed in  
20 mass produced roadgoing motor cars despite the fundamental design difference as between full annulus aircraft brakes and spot-type road vehicle brakes. However, the infinitely different operating regimes in which aircraft brakes are required to perform (as compared with such brakes on motor  
25 cars) render the technical teaching available from such well-established prior use in aircraft brakes, of relatively little significance.

One such factor is the fact that the brakes of an aircraft such as a commercial airliner operate at most three  
30 or four times per day and on those occasions are required to perform a braking operation to a very substantial proportion of their total braking capacity (the entire structure being raised to a very substantial temperature in the post-landing phase) and this contrasts very remarkably with the situation

of the brakes of mass-produced motor cars where multiple light applications of the brakes may be required throughout the day at a rate of many per minute.

Other factors include the service and use regimes under which aircraft and motor cars operate. These can be summarised in terms of endless use with minimum (within statutory regulations) service within the cost constraints of the mass market, for mass motor vehicle, and occasional use under highly serviced conditions (as imposed by aircraft operating regulations), as applied to aircraft brakes.

We are aware that a brake-by-wire product to meet mass market requirements must offer an acceptable compromise between the conflicting demands of size and cost and actuation efficiency while meeting the demands discussed above and a brake which is able to meet these demanding factors represents a blend of complementary features which (we have found) represents a rather limited range of brake design features which cooperate in the necessary way.

Thus, in the embodiments of this invention as described below, we do not say that any one particular feature represent the sole key to the solution of the longstanding problem of braking-by-wire. What we do say is that we believe that the embodiments described below represent the first acceptable combination of features which enable a brake-by-wire system to be provided which has the potential to meet the requirements of the mass market.

It goes without saying of course that electric servo devices have been used for operating specific embodiments of brakes for mechanisms of various kinds, and no claim is made to the application of such servo devices to braking systems in a general way. Indeed, it is believed that the application of the present invention finds its main commercial and technical field of use in relation to that specific range of braking systems which is defined by such

features as, firstly, at least two axially slideable brake discs, these discs being mounted for controlled axially slidable movement. The discs are also mounted so as to be under the control of attitude control means which defines their parallel planar relationship (while not necessarily ruling out some degree of non-planarity under the dynamic conditions of use). In addition, the system provides friction elements interleaved with the discs and corresponding attitude control means for the friction elements adapted to maintain their parallel planar relationship to the friction surfaces of the discs while permitting some degree of non-planarity under the dynamic conditions of use, as in the case of the discs. The disc position of the friction elements with respect to the discs is such that only a portion (and in one sector only of each disc) of the friction surfaces of the discs is engaged at any given time, thereby defining a spot-type relationship between the friction elements and the discs.

Other factors affecting the design parameters of a brake-by-wire system for viable commercial operation include the need for (under present regulations) a system default capability in which an hydraulic brake actuation system is able to provide a reserve braking function. Such systems can however be fairly readily integrated into an electrically operated braking system by the technically competent person on the basis of simple additional facilities provided in parallel to those of the electrically-operated actuating system.

Examples of disclosures relating to so-called brake-by-wire systems include the disclosures in WO97/30295 and WO 96/18531 and in a paper entitled "Autotech 95" reference C498/12/161 of the Institution of Mechanical Engineers entitled Motor Based Brake Control Technology. In these prior disclosures, the WO 295 specification concentrates its

disclosure on details of the actual thrust generating device provided in the disc brake caliper. The WO 531 specification concentrates on the details of the hydraulic system. The I.Mech.E article concentrates on overall system design. None  
5 of the disclosures in these three representative publications recognises or provides any clear teaching of relevance with respect to the concept of the present invention namely the use of a particular brake structure as a basis for a commercially effective brake-by-wire system  
10 for the mass commercial market.

Numerous other examples of prior publications relating to electrically actuated brakes could be cited but in all cases known to the applicants the disc brake involved is of generally standard and unremarkable construction. Thus the  
15 WO 295 specification shows a conventional single fixed disc arrangement. The I.Mech.E article shows, where it does mention detailed brake construction, the use of a specific DC motor-operated electric screw device for the shoes of a drum brake. There appears to be no disclosure in the state  
20 of the art to the effect that a viable brake-by-wire system requires the use of a certain class of disc brake construction in accordance with the teachings of the present invention.

Examples of many published braking systems in which an  
25 electric motor or drive of some kind is used to actuate the brakes are :-

GB 23 07 528A (Mercedes-Benz)

GB 21 56 021A (Teves)

in which there are disclosed, respectively, an electro  
30 hydraulic brake system for a road vehicle, and a process and apparatus for the control of a brake unit for automotive vehicles. Both of these specifications take the conventional approach of discussing principally the details of the construction and mode of operation of the control system,



while leaving to one side the question of significance of the brake construction itself. The Teves document does mention that the brake in question is a spot-type disc brake as shown in Figs 1 and 3. The Mercedes Benz document mainly refers to front-wheel brakes 11 and 12 and rear-wheel brakes 13 and 14 which can be actuated by means of a brake-pressure control device. The diagrammatic representation of these suggests they may also be spot-type disc brakes. Certainly, there is no explicit disclosure of spot-type disc brakes of the sliding disc kind, and not even a hint that the construction of the brakes themselves may have the slightest relevance to the technical/commercial feasibility of such a braking system for automotive vehicles.

There is disclosed in WO 98/26191 (T & N Technology Limited - assigned to Delphi Technologies Inc), our reference 2560, published 18 June 1998, one example of a brake having two axially slidable brake discs with springs between the brake discs and the hub and between the friction pads and the caliper. Such is just one example of a spot-type automotive disc brake employing slidable discs which, though not numerous, certainly had been proposed on paper prior to the WO 191 specification.

However, easy though it is to find prior paper publications relating to the features which co-operate to provide the working combination of the present invention on a mere hindsight basis, more difficult is the task of finding any explicit prior disclosure which has the slightest relevance to the question of whether such a combination would be tested with any more expectation of a favourable result than any other electrical brake operating system and one or more of the tens of thousands of published drum and disc brake systems for automotive vehicles. As indicated above, the above Mercedes-Benz and Teves documents contain no such suggestion. Equally, the T & N - assigned to

Delphi document concerns itself entirely with the question of how to construct the fixed caliper of a slidable-disc disc brake system in a manner which is cost-effectively strong for the purposes concerned.

5           In this connection it bears mentioning that the size-reduction implications of the present invention in relation to electrical actuators for braking systems are necessarily defined by reference to the required brake actuating thrust which, it will be appreciated, has a proportional  
10           relationship to actuator size and acceptability or not for mass production in the same vehicle market (in terms of actuator size) is obviously a matter of degree in relation to size. The actuating thrust requirement is likewise inter-related to the number of brake discs involved and the use of  
15           the resultant disc brake at the front or rear of the vehicle. In the case of a small vehicle with an appropriate front/rear braking effort distribution ratio, the level of thrust required for brake actuation at the rear brings a rear single-disc disc brake within the limits in terms of  
20           actuating thrust to which the embodiments of the present invention relate.

          According to the invention there is provided a method and apparatus as defined in the accompanying claims.

          In embodiments of the present invention it may not in  
25           all cases be essential to employ two or more slidable discs since under certain vehicle design and weight operating parameters a single disc may be sufficient. For example, in the case of certain relatively small mass produced cars, the percentage braking distribution between front and rear may  
30           be as unequal as 70 : 30. In such a case it may well be sufficient to provide a single slidable disc for each rear brake, while the front brakes have twin discs in view of their more than double (the rear) share of the braking burden, and it is to be understood that the features of the

embodiments of the present invention which lead to the advantages discussed above provide a combination of brake design features which, we have discovered, interact to meet the performance and weight and size criteria needed for  
5 brake-by-wire functions in a modern mass-produced motor car, rather than achieving the desired advantages as a direct result of one or two specific design features acting or co-operating to provide one specific function in the usual way.

Further features which lead, in combination, to the  
10 benefits provided by the embodiments of the invention include the brake disc and friction element attitude-control and dynamics control systems whereby the well-established difficulties associated with maintenance of a proper parallel planar relationship between the interacting (when  
15 the brake is applied) surfaces of the brake is achieved even under the dynamic conditions of use which arise in a modern mass produced motor vehicle, not ignoring the minimal service provision for such vehicles which has been discussed above.

20 In most embodiments the attitude and dynamics control systems are provided by resilient means in the form of a wire or leaf-type spring or springs. There is considerable scope for design flexibility in this area of the brake's construction and reference is directed to our pending  
25 unpublished GB patent applications in this respect (our references P54615/6/7/8/9GB and 30039/40/1/2/3 serial numbers:

GB 00 10 810.0  
GB 00 10 808.4  
30 GB 00 10 807.6  
GB 00 10 805.0  
GB 00 10 804.3

For disclosure purposes we incorporate herein the entire disclosure of the above identified co-pending

applications herein.

One aspect of the technical basis on which the embodiments of the present invention meet the requirements for providing a viable system for braking-by-wire relates to the design concept (concerning brake structural features) of providing a central hub or mounting on which the discs or disc are axially slidable. In the case where two or more discs are provided in this spot-type disc brake, with interleaved friction elements and an actuation system to cause axially-directed compression of the assembly in the sense of bringing the friction surfaces into braking engagement, the availability of additional braking surfaces for generating the friction effect has the result that the force per unit area needed to be applied to the friction elements is correspondingly reduced, thereby enabling a simplification of the arrangements needed for the generation of the brake-actuating forces from an electrically-based servo motor. However, these features are inter-related to other features of the brake, and indeed to the front/rear positioning and loading of the specific embodiment of the invention, in view of the fact (discussed elsewhere herein) that a single disc assembly provided on an axially-slidable basis is sufficient for rear vehicle wheel braking purposes in many cases for motor cars of small to modest size in the mass-produced market.

Therefore, we summarise the features of the embodiments of the invention in terms of their combined effect in meeting the requirements of braking-by-wire and with an emphasis on the principal brake design features concerning at least one or more axially slidable discs mounted on a central hub or the like and interleaved with an assembly comprising at least one correspondingly axially slidable friction element, the provision of means for attitude and dynamics/movement control in use under the actuating effect

of an electrically-energised servo motor which generates in use an actuating force less than that required to operate a front vehicle wheel disc brake system of a same or similar vehicle on a fixed disc and moving caliper basis.

5        Embodiments of the invention will now be described by way of example with reference to the accompanying drawings in which:

Fig 1 shows apparatus adapted to provide a method for controlling the front and rear wheel braking systems of a road-going mass-produced motor car or automobile; and

Fig 2 shows, on a considerably larger scale, a section through a wheel hub and associated disc brake forming a front wheel assembly of the vehicle of Fig 1.

As shown in Fig 1, a braking system 10 of a road-going mass-produced motor car or automobile 12 comprises a driver-operable brake actuating control member 14 in the form of a foot pedal. Front wheel brakes 16, 18 and rear wheel brakes 20, 22 are provided for the front and rear wheels 24, 26 and 28, 30 respectively.

20        A brake-actuating and control system 32 for the brakes 16, 18 and 20, 22 comprises electrically-powered servo motors 34, adapted to generate brake-actuating thrust in at least the front wheel brakes. In fact, all four brakes 16, 18 and 20, 22 are provided with such servo motors, to be seen in Fig 2, and which will be more fully described below.

25        As shown in Fig 1, braking system 10 comprises a dual control system 36 whereby foot pedal 14 primarily controls system 32 for the electrically powered servo motors 34 but is provided in addition with a default-operated hydraulic control system 38 to meet current regulatory requirements.

30        For simplicity of illustration in Fig 1, it is to be understood that the dual control system 36 incorporating both the electric control system 32 and a hydraulic control system 38 are represented by the indicated master cylinder

and reservoir assembly to which brake pedal 14 is connected, and the control lines of the electronic control system are likewise represented by the hydraulic lines 42, 44 of the twin hydraulic circuit.

5       The brake actuating and controls system 32 for the servo motors 34 further comprises means (not shown as such) for modulating the brake-actuating thrust (as generated by servo motors 34) in accordance with sensed vehicle operating parameters, for example sensed wheel skid in the case of the  
10       provision of an anti-skid braking system (ABS), or the like.

As will be apparent from Fig 2 of the drawings, the front and rear wheel brakes 14, 16 and 20, 22 are of spot-type disc brake construction in which a central hub or mounting means 46 is adapted to rotate with its respective  
15       vehicle wheel 24, 26, 28 or 30 and to have its associated brake discs 38 mounted thereon for rotation with the hub, the discs having associated friction elements indicated generally at 50 as an assembly, which are mounted on a  
20       corresponding fixed caliper 52 carried on the fixed (but steerable) structure 102 of the wheel mounting and which straddles the outer periphery of the discs and provides guide means and a mounting for the friction elements and their corresponding actuation means comprising the electrically powered servo motors 34.

25       As regards the spot-type construction of the brakes 16, 18 and 20, 22, each brake is located in its own defined sector of the periphery of the brake disc and hub assembly, being constructed to act on the respective discs only over a portion of their annular braking surfaces, such portion  
30       being defined by the circumferentially extending width of the pads of friction material provided on the friction elements.

As is also clearly shown in Fig 2, the assembly 48 of the brake discs comprises twin brake discs 54, 56 for the

front brakes 16, 18 and single brake discs 58 for the rear wheel brakes 28, 30. The discs of the front wheel brakes 16, 18 are mounted on their respective hubs 46 in side-by-side relationship and with a generally parallel planar relationship between the braking surfaces 60, 62 of the discs.

The assembly 50 of friction elements comprises, as shown in Fig 2, 3 friction elements 64, 66, 68 interleaved with the twin discs 54, 56 for frictional engagement with the four braking surfaces 60, 62 of the two discs on opposite sides of the discs in the region of the periphery thereof, the friction elements being mounted on fixed caliper 52 at a fixed position with respect to hub 46.

Shown diagrammatically in Fig 2 in respect of the front wheel brake 16 thereof are attitude and movement control means 70 for the brake discs 54, 56 and corresponding attitude and movement control means 72 for the friction elements 64, 66, 68, such control means acting, respectively, between central hub 46 and the brake discs 44, 46 and between caliper 52 and the friction elements 64, 66, 68.

The attitude and movement control means 70, 72 operate to control the discs and the friction elements with respect to their mountings at least during the time interval between successive actuations of the electrically-powered servo motors 34 to ensure proper alignment of the discs and friction elements in respective parallel relationship while permitting the necessary sliding movement into and out of engagement. For the details of the structure and arrangement of such attitude and movement control means we incorporate herein the disclosure of our above-identified pending GB patent applications. Broadly speaking, such control means comprise leaf or wire springs acting between the mounting structure and the mounted structure which has sufficient

resilient force to maintain the mounted structure in its required defined attitude while permitting controlled sliding movement and preventing rattling.

As mentioned above, attitude control means 70, 72 as shown in Fig 2 are indicated diagrammatically the former acting between the friction elements 64, 66, 68 and caliper 52, and the latter between hub 46 and brake discs 54, 56 (in the case of the front wheel brake 16, 18. It needs to be understood that outer friction element 68 comprises a pad 74 bonded or fixed to the outer plate 76 of caliper 52, and is thus fixed and requires no attitude or movement control. However, friction elements 64, 66 comprise pads of friction material 78, 80, and 82 bonded to metallic backing plates 84, 86 which are slidably mounted on caliper 52 and controlled by the attitude and movement control springs 72.

In the case of brake discs 54, 56, these are controlled by the attitude and movement and control means 70 acting between the hub 46 and the discs themselves.

In use, servo motors 34 draw electrical power from the vehicle battery to cause brake-actuating thrust to be generated and applied to the friction element assemblies to cause brake engagement. The mode of operation for the rear wheel brakes 28, 30 is much the same as for the front wheel brakes 24, 26 only without the central friction element between the twin discs which are provided in the front wheel brakes.

Turning to the construction of the servo motors 34, these comprise an outer stator 88 and an inner annular rotor 90 which is screw-threadedly engaged with the central threaded shank of an actuating spindle 92 which cooperates with the adjacent backing plate of the friction elements assembly to apply brake clamping thrust. A corresponding thrust race 96 is provided at the inner end of the assembly and corresponding ball races 98, 100 to serve to mount rotor



90 within the main brake housing 102. On energization of servo motor 34, rotor 88 rotates causing spindle 92 to be extended to apply the brake. Reverse rotation of the rotor occurs for disengagement. The default-operated hydraulic control system 38 is connected to a piston and cylinder assembly (not shown) formed in rotor 90 whereby spindle 92 and its threaded sleeve can be extended (as the piston) on pressurisation of the cylinder from hydraulic lines 42, 44.

In a further embodiment, not illustrated, there is provided a servo motor-operated hydraulic pump device adapted to deliver hydraulic pressure to a hydraulic piston and cylinder assembly within housing 102 and which is provided instead of servo motor 34 and its rotor and spindle assembly.

CLAIMS :-

1. A method of controlling the front and rear wheel  
5 braking system of a road-going mass-produced motor car or  
automobile or the like comprising :-

a) providing a driver-operable brake actuating control  
member adapted to provide driver control of the braking  
system;

10 b) providing front wheel brakes and rear wheel brakes  
for said vehicle;

c) providing a brake-actuating and control system for  
said front wheel brakes and comprising said driver-operable  
brake actuating control member;

15 d) providing said brake actuating and control system  
comprising at least one electrically-powered servo motor  
adapted to generated brake-actuating thrust in at least said  
front wheel brakes; and

e) providing said control system of said brake  
20 actuating and control system comprising means for modulating  
said brake-actuating thrust in accordance with sensed  
vehicle operating parameters; and

f) providing said front wheel brakes comprising spot-  
type disc brakes each comprising central hub or mounting  
25 means adapted to rotate with a vehicle wheel and to have a  
brake disc mounted thereon for rotation therewith, and said  
disc having associated friction elements mounted on a  
corresponding caliper adapted to straddle an inner or outer  
periphery of said disc to permit the brake-actuating thrust  
30 generated by said servo motor to be applied to said brake  
disc and friction element assembly;

characterised by

g) providing said at least front wheel disc brakes  
comprising at least two brake discs adapted to be axially

slidably mounted on said hub or mounting in side-by-side relationship and with a generally parallel planar relationship between the braking surfaces of said discs; and

h) providing said at least two brake discs having at  
5 least three of said friction elements interleaved therewith for frictional engagement with four annular braking surfaces on opposite sides of said discs in the region of a periphery thereof, said friction elements being mounted on said caliper which is itself mounted at a fixed position with  
10 respect to said hub or mounting; and

i) providing said at least two brake discs and said at least three friction elements and said hub or mounting with attitude and dynamic movement control means adapted to act between said hub and said discs and between said fixed  
15 caliper and said friction elements to control said attitude and movement of said axially slidable discs with respect to said hub, and to control said attitude and movement of said friction elements with respect to said fixed caliper, at least during the time intervals between successive  
20 actuations of said electrically-powered servo motor to operate said brake; and

j) said method comprising the step of causing said electrically powered servo motor to draw electrical power from a source thereof to cause said brake-actuating thrust  
25 to be generated in at least said front-wheel brakes so as to cause frictional engagement of said four braking surfaces with at least said three friction elements under the control of said control system, and said brake actuating thrust generated by said servo motor being less than the  
30 corresponding thrust to generate the same braking effect in an otherwise similarly-dimensioned spot-type disc brake comprising a single fixed brake disc and a pair of friction elements mounted on a movable caliper.

2 A method of controlling the braking system of a motor vehicle comprising providing an electrically powered servo motor adapted to generate brake-actuating thrust and characterised by providing a disc brake comprising at least  
5 two brake discs adapted to be axially slidably mounted on a rotatable hub, together with associated friction elements interleaved with said discs and said servo motor being arranged to actuate said assembly of brake discs and friction elements to effect braking.

10

3 A method according to claim 1 or claim 2 characterised by said brake-actuating thrust being generated by a hydraulic piston and cylinder mechanism to which said servo motor supplies hydraulic fluid under pressure.

15

4 A method according to claim 1 or claim 2 characterised by said servo motor being arranged itself to generate said brake-actuating thrust.

20

5 A front and rear wheel braking system of a road-going mass-produced motor car or automobile or the like comprising :-

a) a driver-operable brake actuating control member adapted to provide driver control of the braking system;

25

b) front wheel brakes and rear wheel brakes for said vehicle;

c) a brake-actuating and control system for said front wheel brakes and comprising said driver-operable brake actuating control member;

30

d) said brake actuating and control system comprising at least one electrically-powered servo motor adapted to generate brake-actuating thrust in at least said front wheel brakes; and

e) said control system of said brake actuating and

control system comprising means for modulating said brake-actuating thrust in accordance with sensed vehicle operating parameters; and

5 f) said front wheel brakes comprising spot-type disc brakes each comprising central hub or mounting means adapted to rotate with a vehicle wheel and to have a brake disc mounted thereon for rotation therewith, and said disc having associated friction elements mounted on a corresponding caliper adapted to straddle an inner or outer periphery of  
10 said disc to permit the brake-actuating thrust generated by said servo motor to be applied to said brake disc and friction element assembly;

characterised by

g) said at least front wheel disc brakes comprising at  
15 least two brake discs adapted to be axially slidably mounted on said hub or mounting in side-by-side relationship and with a generally parallel planar relationship between the braking surfaces of said discs; and

h) said at least two brake discs having at least three  
20 of said friction elements interleaved therewith for frictional engagement with four annular braking surfaces on opposite sides of said discs in the region of the periphery thereof, said friction elements being mounted on a caliper which is itself mounted at a fixed position with respect to  
25 said hub or mounting and;

i) said at least two brake discs and said at least three friction elements and said hub or mounting with attitude and dynamic movement control means adapted to act between said hub and said discs and between said fixed  
30 caliper and said friction elements to control said attitude and movement of said axially slidable discs with respect to said hub, and to control said attitude and movement of said friction elements with respect to said fixed caliper, at least during the time intervals between successive

actuations of said electrically-powered servo motor to operate said brake; and

j) said system being adapted to cause said electrically powered servo motor to draw electrical power from a source thereof to cause said brake-actuating thrust to be generated in at least said front-wheel brakes so as to cause frictional engagement of said four braking surfaces with at least said three friction elements under the control of said control system, and said brake actuating thrust generated by said servo motor being less than the corresponding thrust to generate the same braking effect in an otherwise similarly-dimensioned spot-type disc brake comprising a single fixed brake disc and a pair of friction elements mounted on a movable caliper.

15

6 braking system of a motor vehicle comprising providing an electrically powered servo motor adapted to generate brake-actuating thrust and characterised by a disc brake comprising at least two brake discs adapted to be axially slidably mounted on a hub, together with associated friction elements interleaved with said discs and said servo motor being arranged to actuate said assembly of brake discs and friction elements to effect braking.

25

7 A system according to claim 5 or claim 6 characterised by said brake-actuating thrust being generated by a hydraulic piston and cylinder mechanism to which said servo motor supplies hydraulic fluid under pressure.

30

8 A system according to claim 5 or claim 6 characterised by said servo motor being arranged itself to generate said brake-actuating thrust.

9 A disc brake adapted for use in a method according to any one of claims 1 to 4.

-1/2-


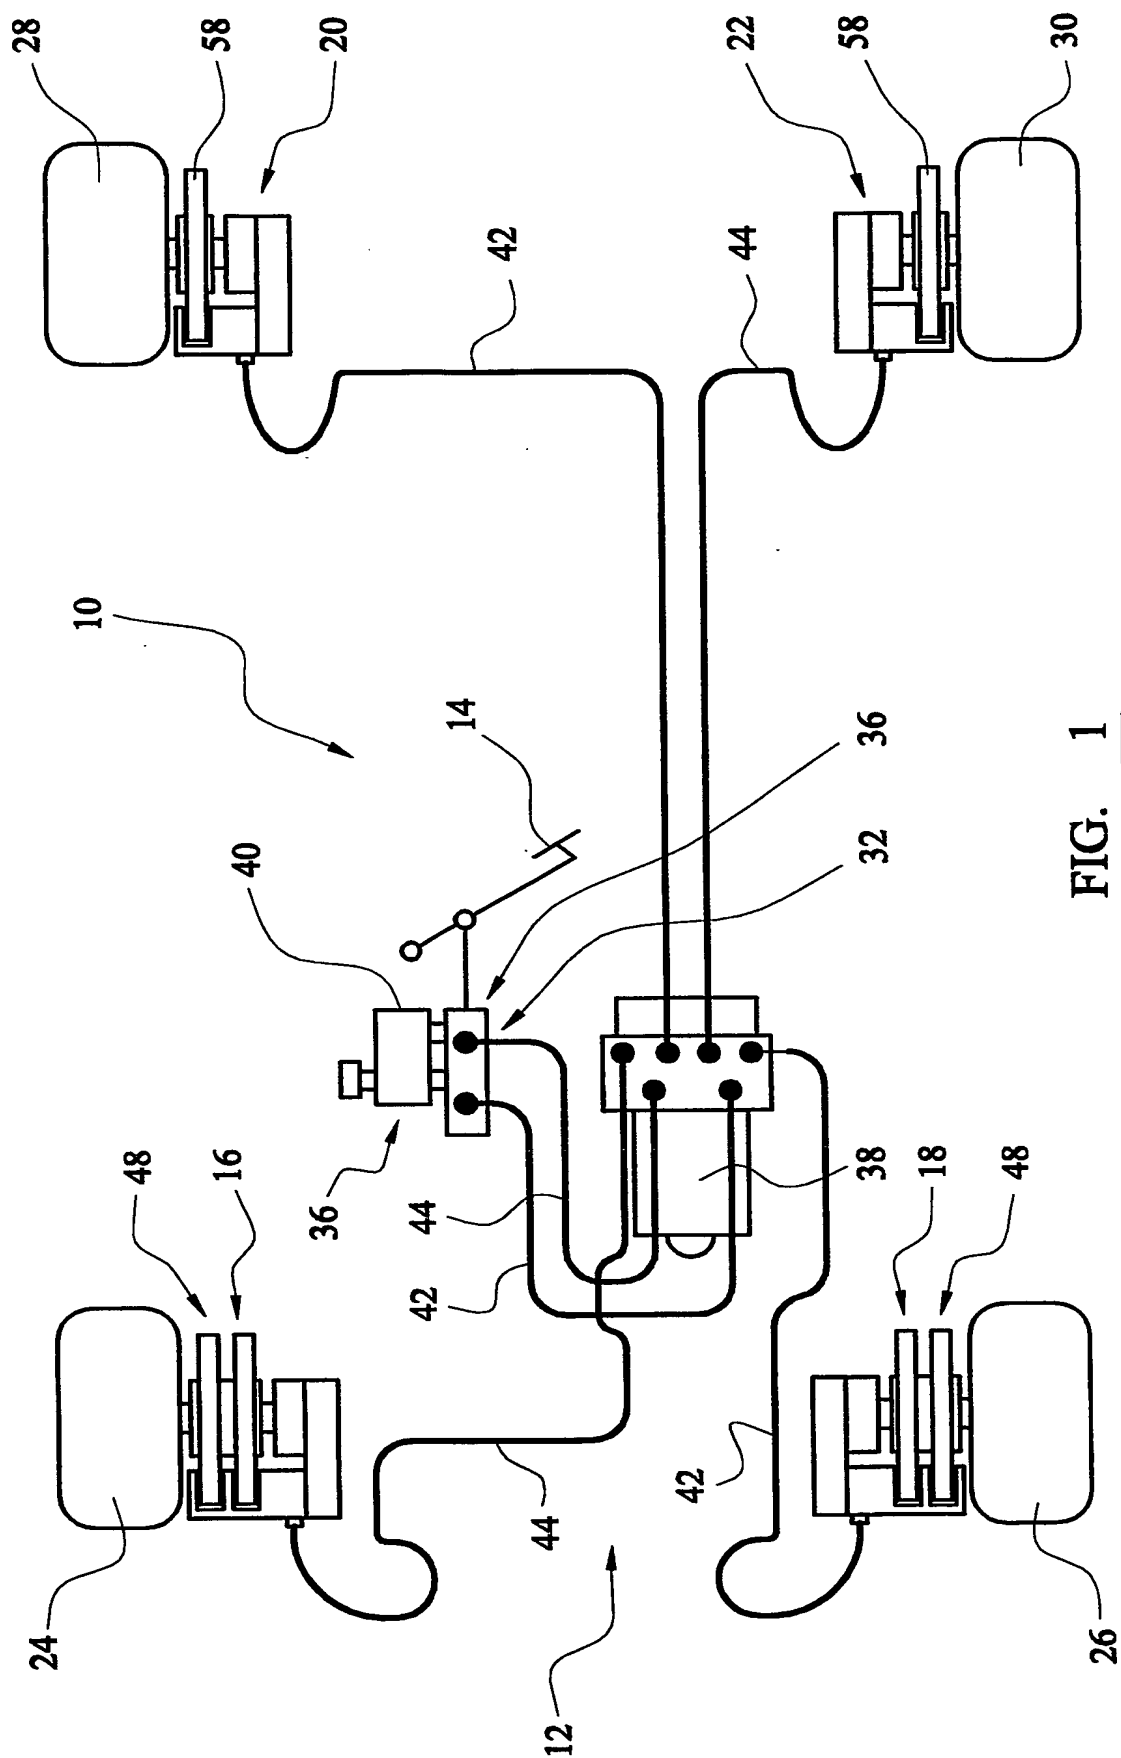


FIG. 1

-2/2-

FIG. 2

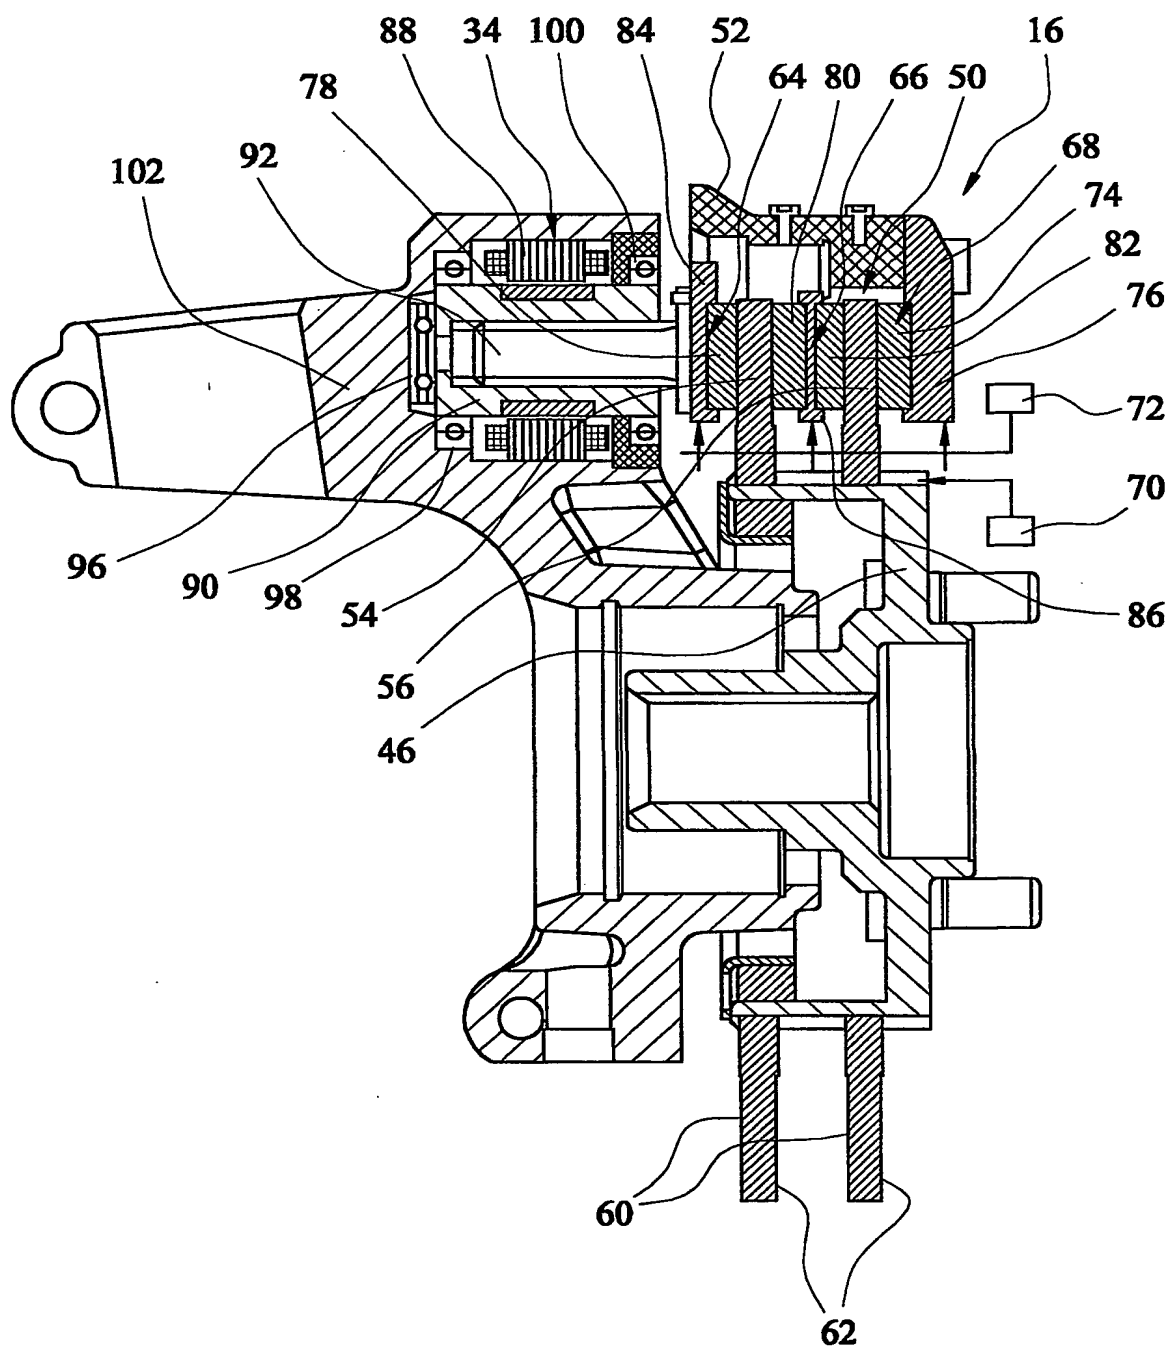

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB 01/03295

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B60T13/66 B60T13/74 F16D55/40

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B60T F16D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

PAJ, WPI Data, EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 83 01044 A (PIETZSCH LUDWIG) 31 March 1983 (1983-03-31) page 7, line 28 -page 8, line 13 page 8, line 20 -page 9, line 18; figure 5	1,2,4-6, 8,9
X	EP 0 296 728 A (GEN MOTORS CORP) 28 December 1988 (1988-12-28) column 6, line 33 - line 48; figure 2	1-3,5-7, 9
X	US 4 865 162 A (MOSELEY DOUGLAS D ET AL) 12 September 1989 (1989-09-12) column 3, line 22 - line 54; figures 1-4	1,2,4-6, 8,9
X,P	WO 01 15948 A (ALLIED SIGNAL INC) 8 March 2001 (2001-03-08) page 3, line 1 - line 12; figure 1	1,2,4-6, 8,9

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

25 October 2001

Date of mailing of the international search report

02/11/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Blurton, M

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No  
PCT/JP 01/03295

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 8301044	A	31-03-1983	AT 21361 T	15-08-1986
			DE 3272580 D1	18-09-1986
			WO 8301044 A1	31-03-1983
			EP 0089347 A1	28-09-1983
			JP 58501585 T	22-09-1983
EP 0296728	A	28-12-1988	US 4768401 A	06-09-1988
			BR 8803062 A	10-01-1989
			CA 1286235 A1	16-07-1991
			EP 0296728 A2	28-12-1988
			JP 1063429 A	09-03-1989
US 4865162	A	12-09-1989	FR 2608241 A1	17-06-1988
			GB 2199097 A , B	29-06-1988
WO 0115948	A	08-03-2001	AU 1568801 A	26-03-2001
			WO 0115948 A2	08-03-2001